

FIREFRONT ENGINEERING LLP
175 Darkes Lane, Suite B, 2nd Floor, Potters Bar, Hertfordshire, EN6 1BW, England, Great Britain

FIRE EQUIPMENT
PRODUCT CATALOGUE

PRODUCT CATALOGUE

FIRE FRONT

1. Specification

MODEL: MFZ-4



4KG BC FIRE EXTINGUISHER	
NAME AND DESCRIPTION	**TECHNICAL SPECIFICATION**
SUITABLE FIRE	
POWDER	BC 40%
CYLINDER SIZE: DIA*HEIGHT	Seamless,D130*H410mm
CYLINDER THREAD	M30*1.5
POWDERY WEIGHT	4 KG
WHOLE WEIGHT	6 KG
VALVE	Brass valve with hanger loop, middle black handle
GAUGE	M8*1
THICKNESS	1.2mm
SIPHON TUBE	M16*1.5*368mm
BRACKET	Steel hook, with black belt 570mm
STANDARD MATERIAL	GB 4351 - 2005
YLINDER PAINTING	7325 Red Painting
TEMPERATURE RANGE	-20°C~+55°C
WORKING PRESSURE	14Bar
TEST PRESSURE	27Bar
DISCHARGE TIME	≥ 14S
DISCHARGE RANGE	5 to 7 M

FIRE FRONT

2. Product introduction

Size and Spefication





Cylinder Height:
410mm

Cylinder Diameter: 130mm

brass valve with hanger loop

green fluorescent

hose size:M16*1.5*480mm

PVC black belt, 570mm length

3. Product details

Feature Images		
		
Discharge hose:M16*1.5*480mm		brass valve
		
Gauge, thread: M8*1		PVC black belt
	Capacity: 4KG BC	
Bottom curls		Siphon tube M16*1.5*368mm

FIRE FRONT

4. Product details







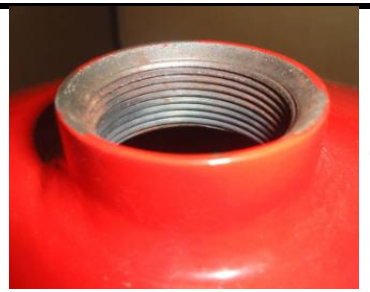

Cylinder thread:M30*1.5



Gauge



Bottom:curls

CBM/CTN	PACKING SIZE
M3	CM
0.0189	27*14*50